

CENTURY VI SERIES

PROGRESSING CAVITY PUMP

Design

Pin driven, sanitary pump that meets FDA standards, 316 Stainless Steel Construction. Tri-clamp, CIP (clean in place) and Acme connections available

Flow Rates and Pressures

Flow capacities to 300 GPM and pressures to 300 PSI

DuraFlo™ Stator Elastomers

Food Grade Buna (Nitrile) (Grey or White)

Food Grade Natural Rubber

Food Grade EPDM

Food Grade Viton

Application Versatility

The innovative Century VI was designed to meet FDA requirements in the food processing, pharmaceutical/ cosmetics and chemical industries



Food Processing

- Meat Products/ Poultry Processing
- Sugar and Confectionary Products
- Bakery Products and Bread Dough
- Fillings, Crackers, and Cookies
- Chocolate, Candy and Gum
- Fruits and Vegetables
- Jams, Jellies, Sauces and Juices
- Fats and Oils
- Food Coatings
- Margarine/Shortening
- Syrups and Flavoring Extracts
- Wine and Beer

Pharmaceutical/ Cosmetics



- Skin Cream
- Shampoos
- Medicinal (pill) Slurries

Chemical

- Fertilizers
- Cleaning Solution
- Insecticides
- Inks and Paints
- Caulks/Adhesives
- Chemical Feed

Century VI Series

PROGRESSING CAVITY PUMP

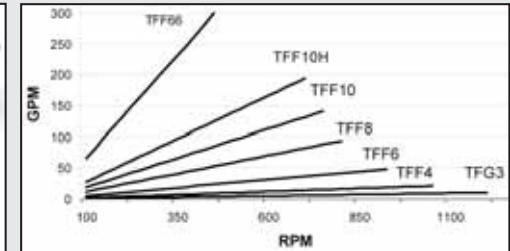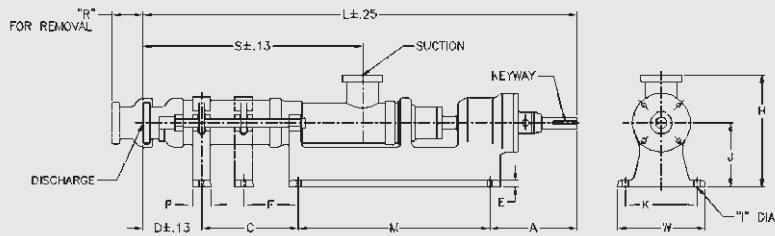

Dimensions (inches)

PUMP MODEL	DIMENSIONS / INCHES																	
	A	B	C	D	E	F	H	I	J	K	L	M	N	P	R	S	U	W
1TFG3	6.50	14.00	5.00	5.00	0.50	-	7.63	0.44	4.13	5.00	30.50	15.50	3.00	2.00	4.88	16.19	0.94	6.25
2TFG3	6.50	14.00	7.00	8.50	0.50	-	7.63	0.44	4.13	5.00	36.00	15.50	3.00	2.00	4.88	21.69	0.94	6.25
3TFG3	6.50	14.00	16.00	5.00	0.50	5.00	7.63	0.44	4.13	5.00	41.50	15.50	3.00	2.00	4.88	27.19	0.94	6.25
1TFF4	6.50	14.00	5.00	7.06	0.50	-	7.88	0.44	4.13	5.00	32.56	15.50	3.00	2.00	4.88	18.00	0.94	6.25
2TFF4	6.50	14.00	10.00	9.00	0.50	-	7.88	0.44	4.13	5.00	39.50	15.50	3.00	2.00	4.88	25.06	0.94	6.25
2TFG4	9.00	17.00	10.00	8.44	0.63	-	10.75	0.69	6.25	7.00	44.44	19.00	4.38	2.50	6.63	25.31	1.13	8.50
4TFG4	9.00	17.00	25.00	7.69	0.63	7.00	10.75	0.69	6.25	7.00	58.69	19.00	4.38	2.50	6.63	39.56	1.13	8.50
1TFF6	9.00	17.00	7.00	8.00	0.63	-	10.75	0.69	6.25	7.00	41.00	19.00	4.38	2.50	6.63	21.88	1.13	8.50
2TFF6	9.00	17.00	18.00	7.69	0.63	-	10.75	0.69	6.25	7.00	51.69	19.00	4.38	2.50	6.63	32.56	1.13	8.50
2TFG6	10.88	24.00	18.00	10.62	0.75	-	14.00	0.81	8.00	9.00	63.50	26.50	4.50	3.00	8.63	37.13	1.38	11.00
3TFG6	10.88	24.00	29.00	10.25	0.75	11.00	14.00	0.81	8.00	9.00	74.13	26.50	4.50	3.00	8.63	47.63	1.38	11.00
1TFF8	10.88	24.00	11.00	8.50	0.75	-	14.00	0.81	8.00	9.00	54.38	26.50	4.50	3.00	8.63	27.50	1.38	11.00
2TFF8	10.88	24.00	23.00	8.81	0.75	7.00	14.00	0.81	8.00	9.00	66.69	26.50	4.50	3.00	8.63	39.81	1.38	11.00
2TFG8	11.50	26.25	22.00	10.00	1.13	7.00	15.75	0.81	9.75	9.00	69.75	29.25	5.00	3.00	10.25	40.81	1.88	11.00
3TFG8	11.50	26.25	34.00	10.38	1.13	12.00	15.75	0.81	9.75	9.00	82.13	29.25	5.00	3.00	10.25	53.19	1.88	11.00
1TFF10	11.50	26.25	12.00	10.56	1.13	-	15.75	0.81	9.75	9.00	60.31	29.25	5.00	3.00	10.25	31.38	1.88	11.00
2TFF10	11.50	26.25	29.00	9.00	1.13	12.00	15.75	0.81	9.75	9.00	75.75	29.25	5.00	3.00	10.25	46.88	1.88	11.00
1TFF10H	11.50	26.25	12.00	10.81	1.13	-	15.75	0.81	9.75	9.00	60.56	29.25	5.00	3.00	10.25	31.63	1.88	11.00
2TFF10H	11.50	26.25	29.00	9.00	1.13	12.00	15.75	0.81	9.75	9.00	75.75	29.25	5.00	3.00	10.25	46.88	1.88	11.00
1TFF66	11.50	26.25	18.00	10.56	1.13	-	15.75	0.81	9.75	9.00	66.31	29.25	5.00	3.00	10.25	37.38	1.88	11.00

PUMP MODEL	KEYWAY	SUCTION DISCHARGE	WEIGHT LB.
1TFG3	.25 X .13	1.5	50
2TFG3	.25 X .13	1.5	54
3TFG3	.25 X .13	1.5	58
1TFF4	.25 X .13	2	52
2TFF4	.25 X .13	2	75
2TFG4	.25 X .13	2.5	127
4TFG4	.25 X .13	2.5	144
1TFF6	.25 X .13	2.5	117
2TFF6	.25 X .13	2.5	150
2TFG6	.38 X .19	3	247
3TFG6	.38 X .19	3	252
1TFF8	.38 X .19	4	273
2TFF8	.38 X .19	4	320
2TFG8	.50 X .25	4	573
3TFG8	.50 X .25	4	614
1TFF10	.50 X .25	4	535
2TFF10	.50 X .25	4	610
1TFF10H	.50 X .25	4	535
2TFF10H	.50 X .25	4	610
1TFF66	.50 X .25	4	550

Stocking Distributors Nationwide:



2205 E.L. Anderson Blvd., Claremore, OK 74017 U.S.A.
Telephone: 800.854.1879 Fax: 918.341.8297

www.tarby.com

© 2002 by Tarby
® Tarby is a registered trademark
™ DuraFlo is trademark of Tarby

Printed in USA
5M PTD 1202